




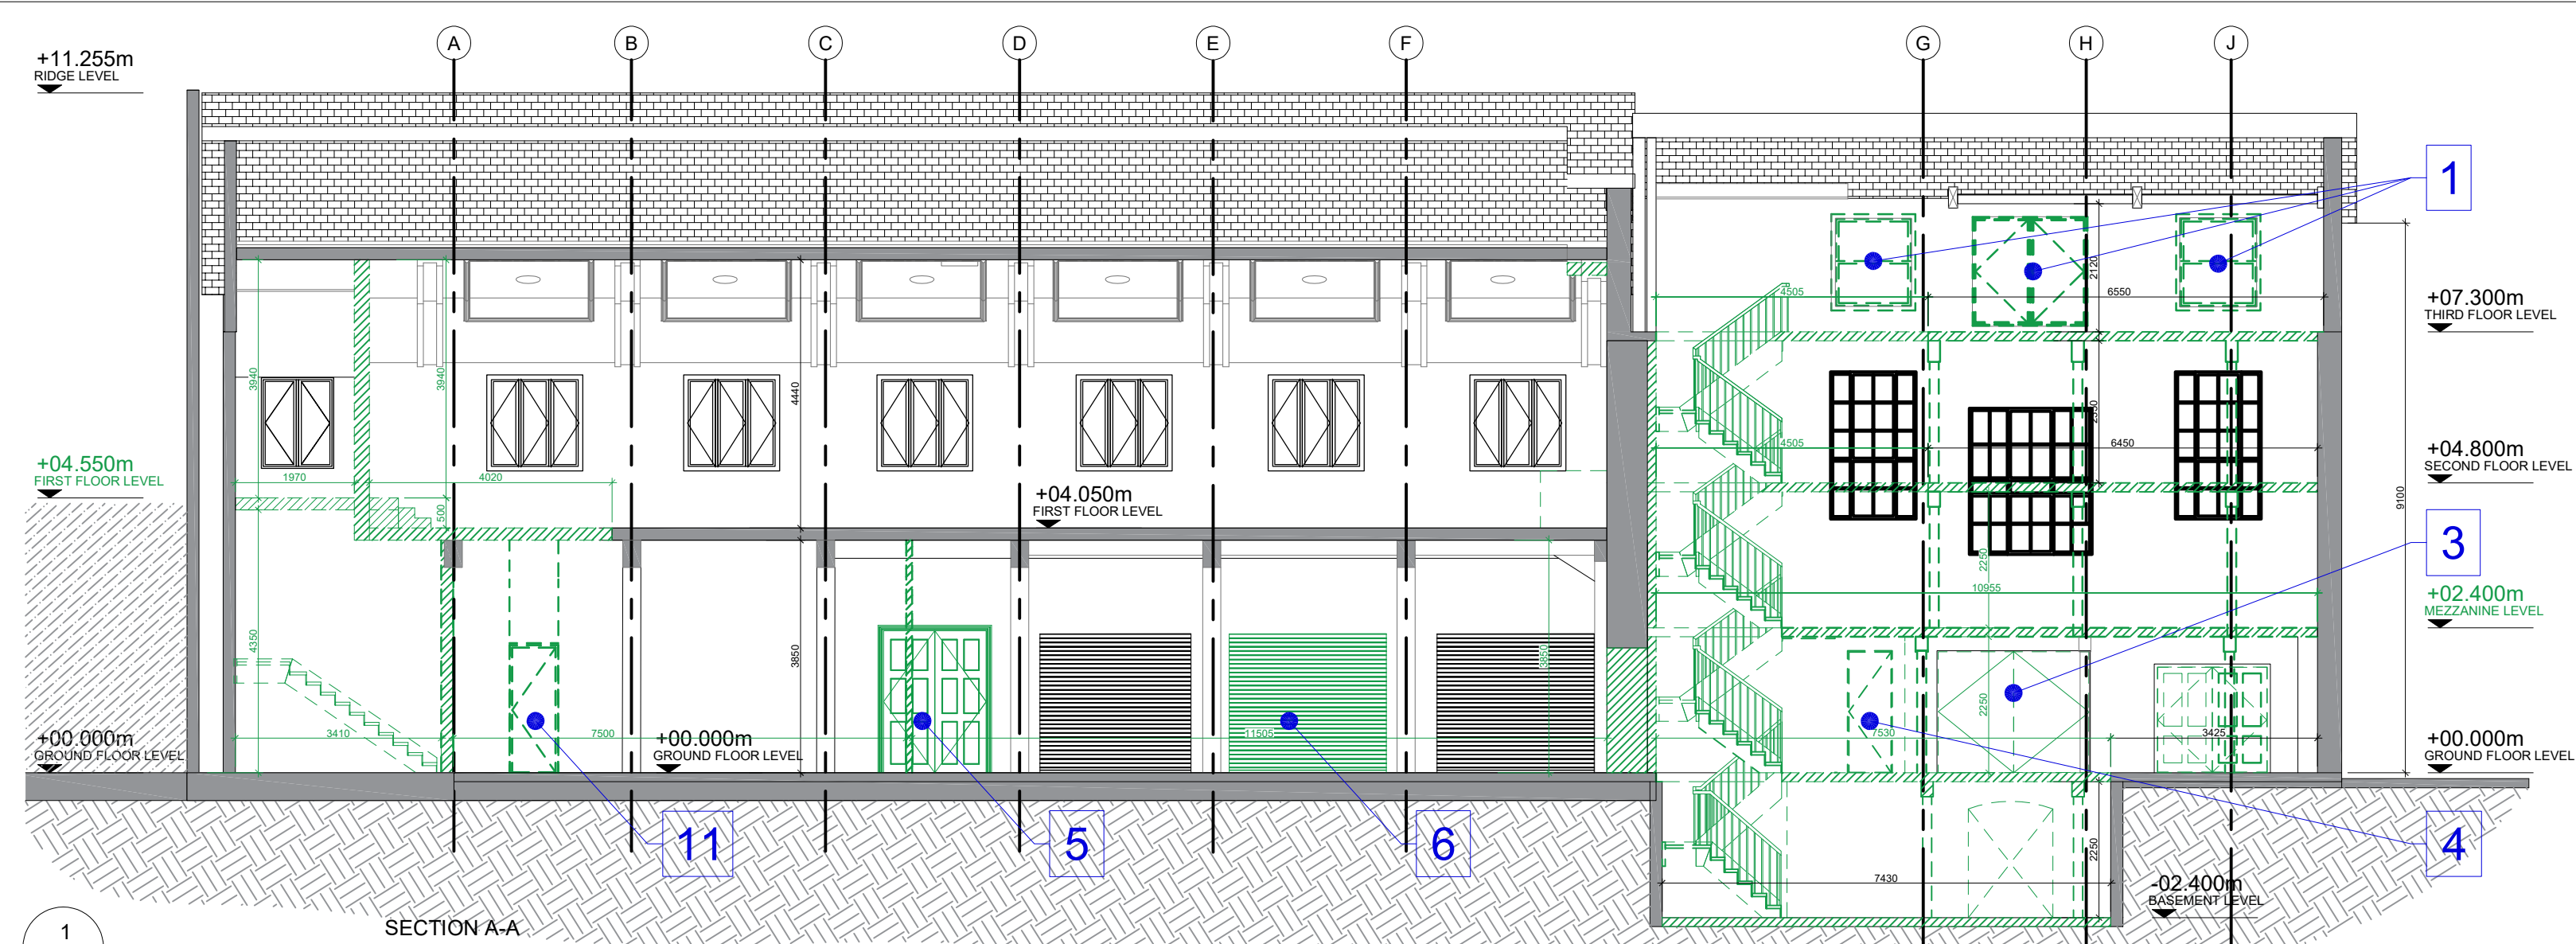


SECTION A-A
SCALE: 1:100

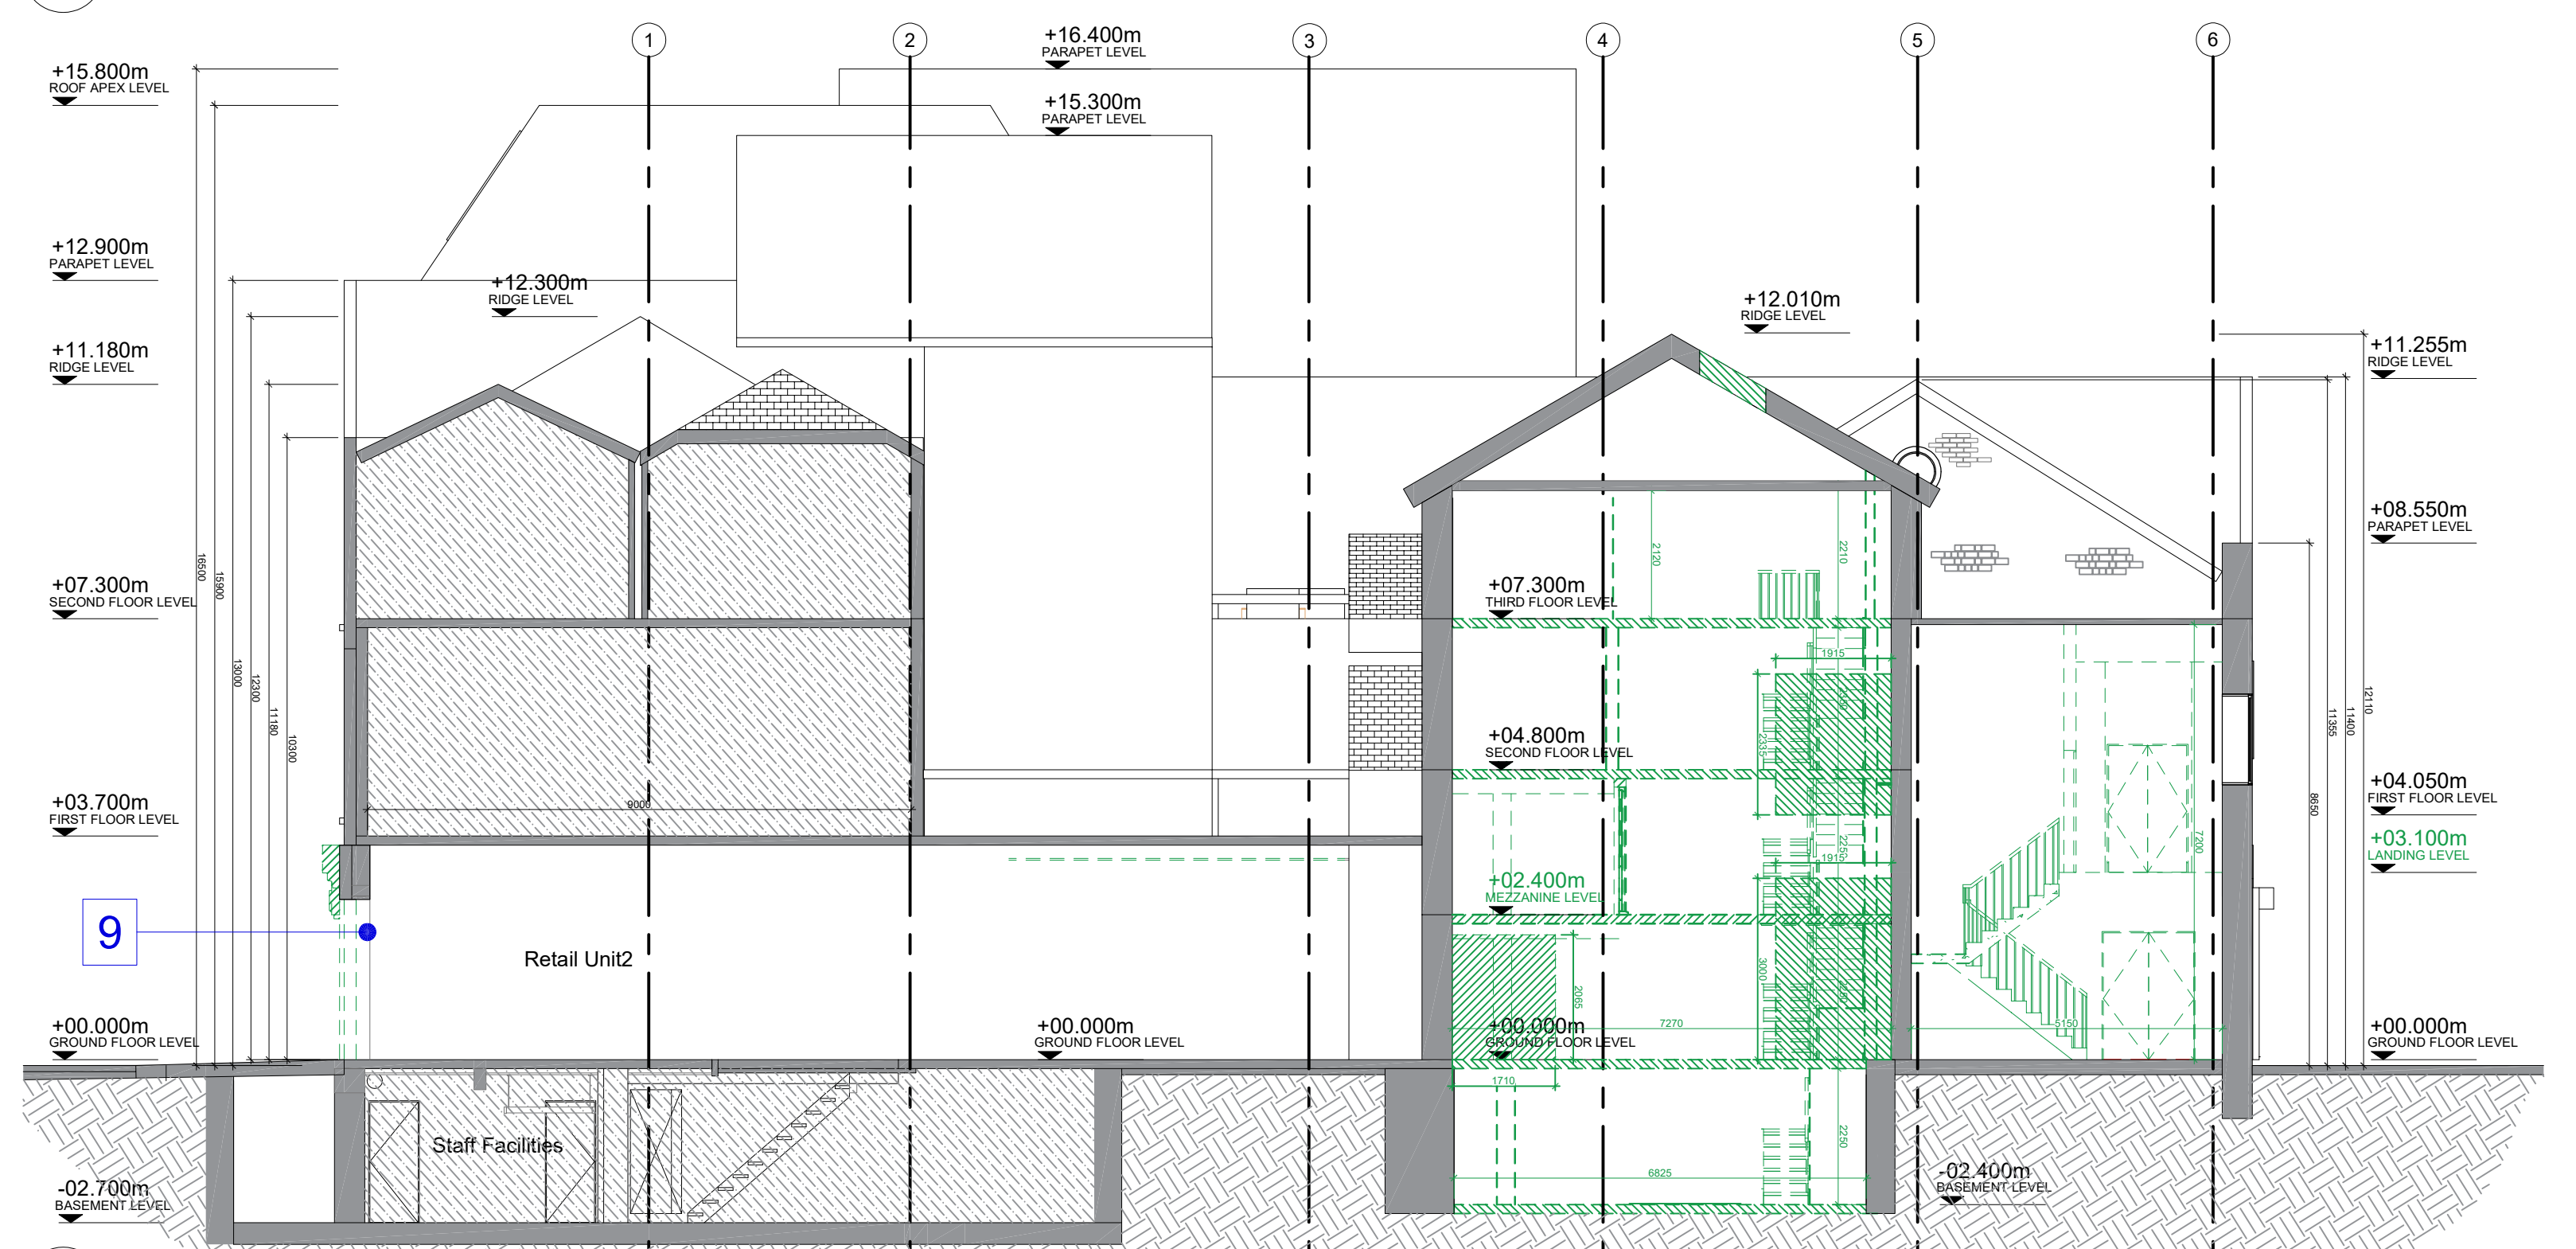

SECTION B-B
SCALE: 1:100

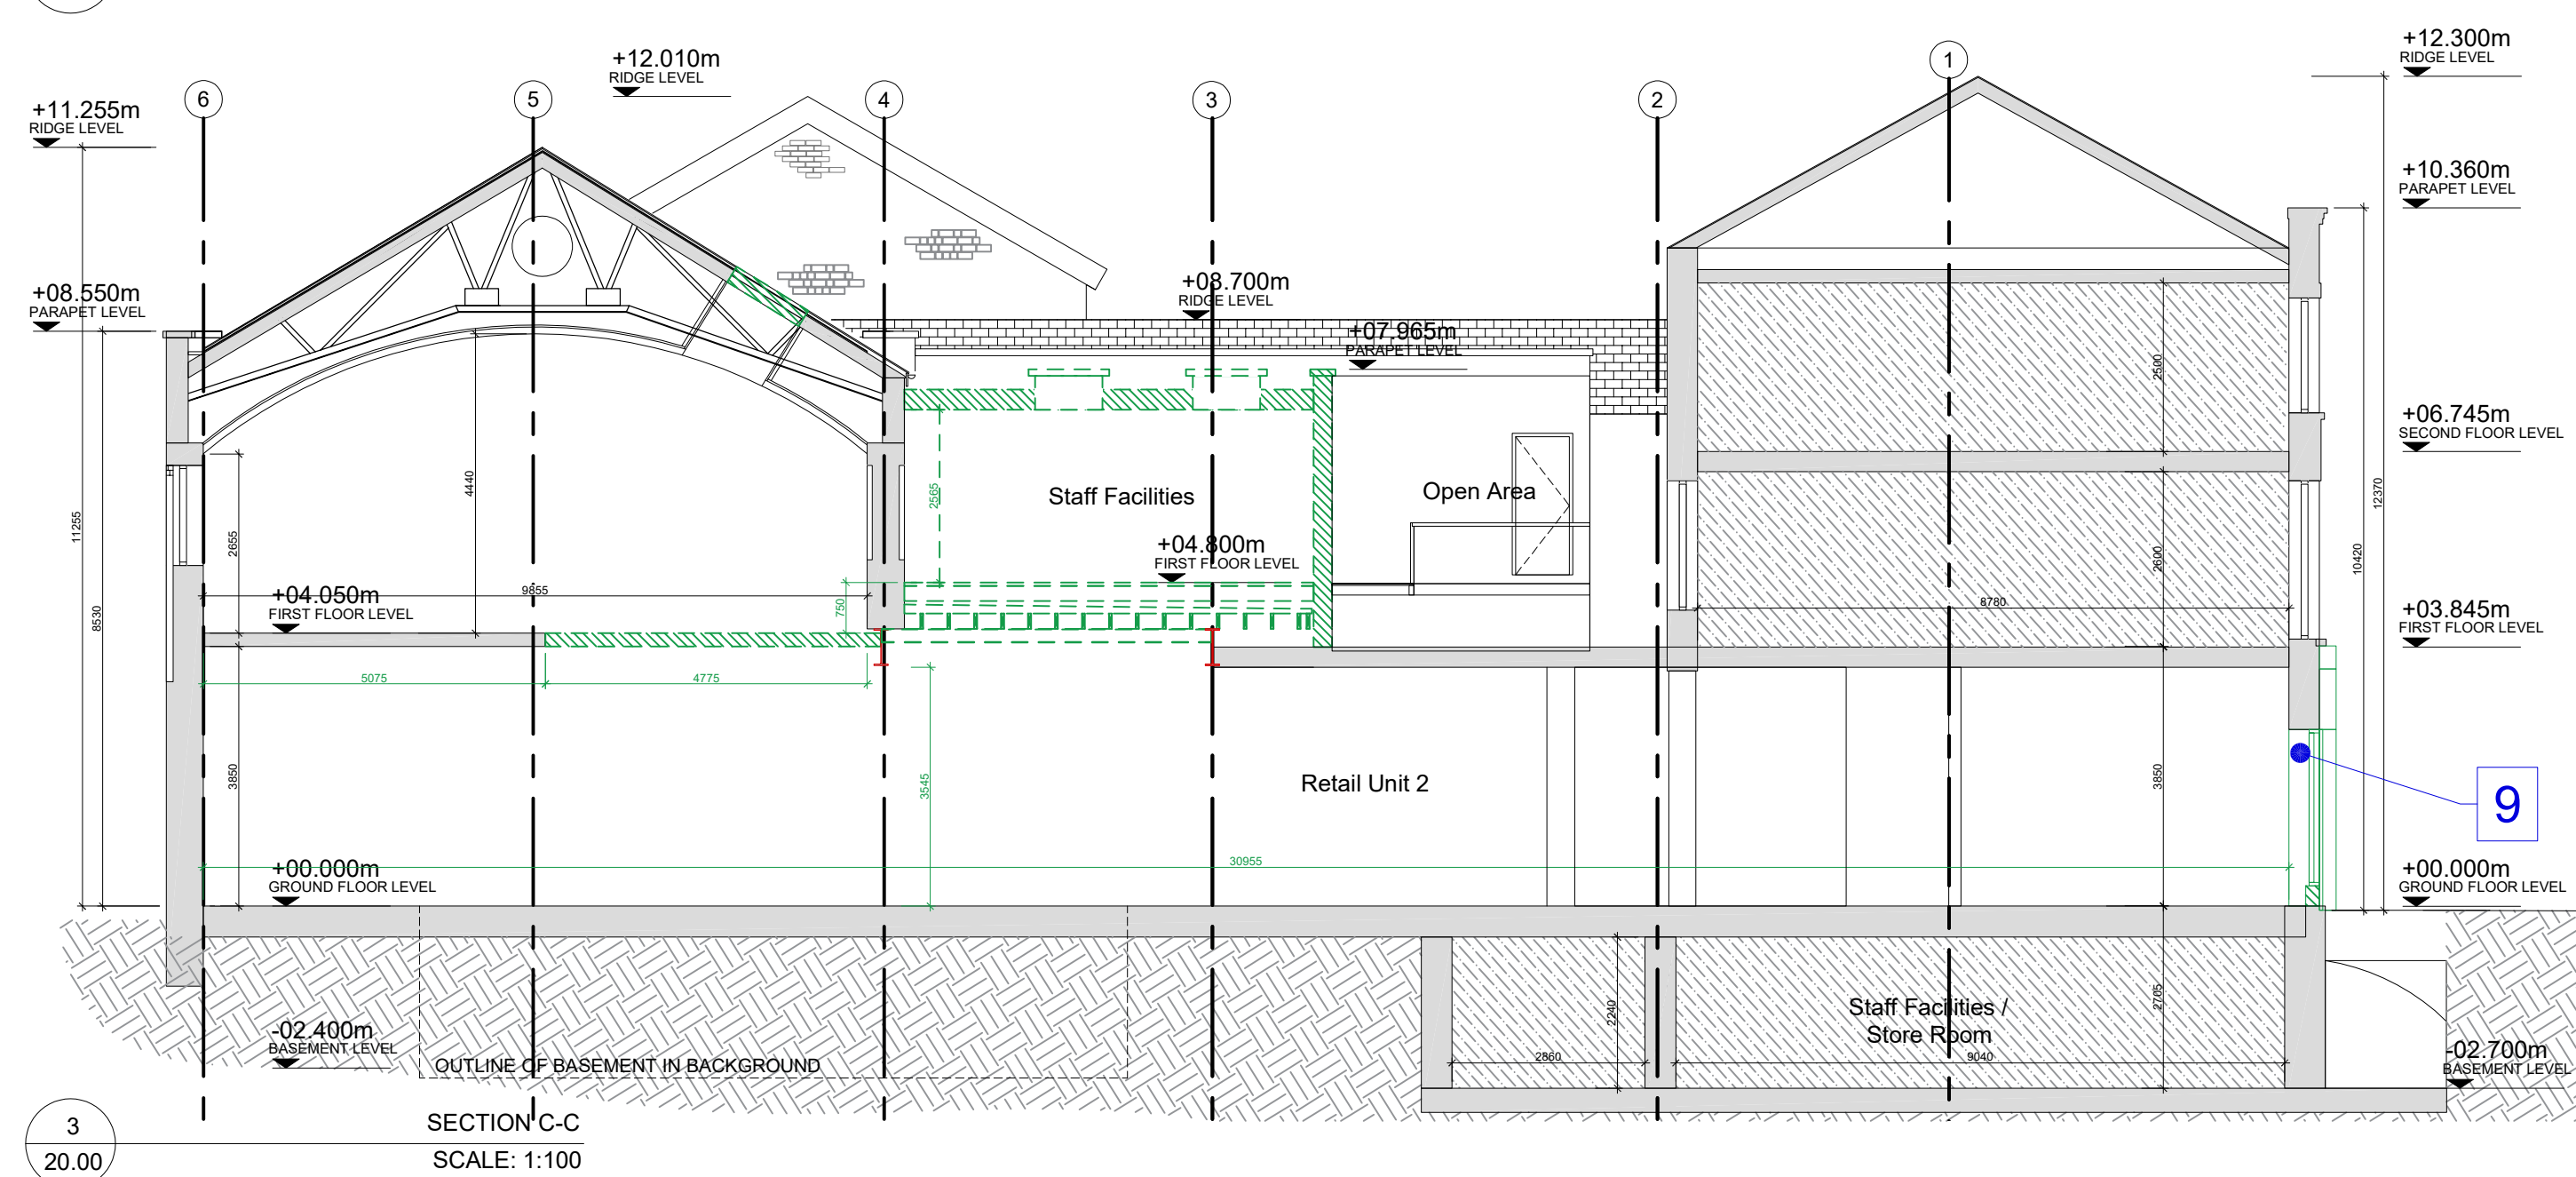


SECTION C-C
SCALE: 1:100

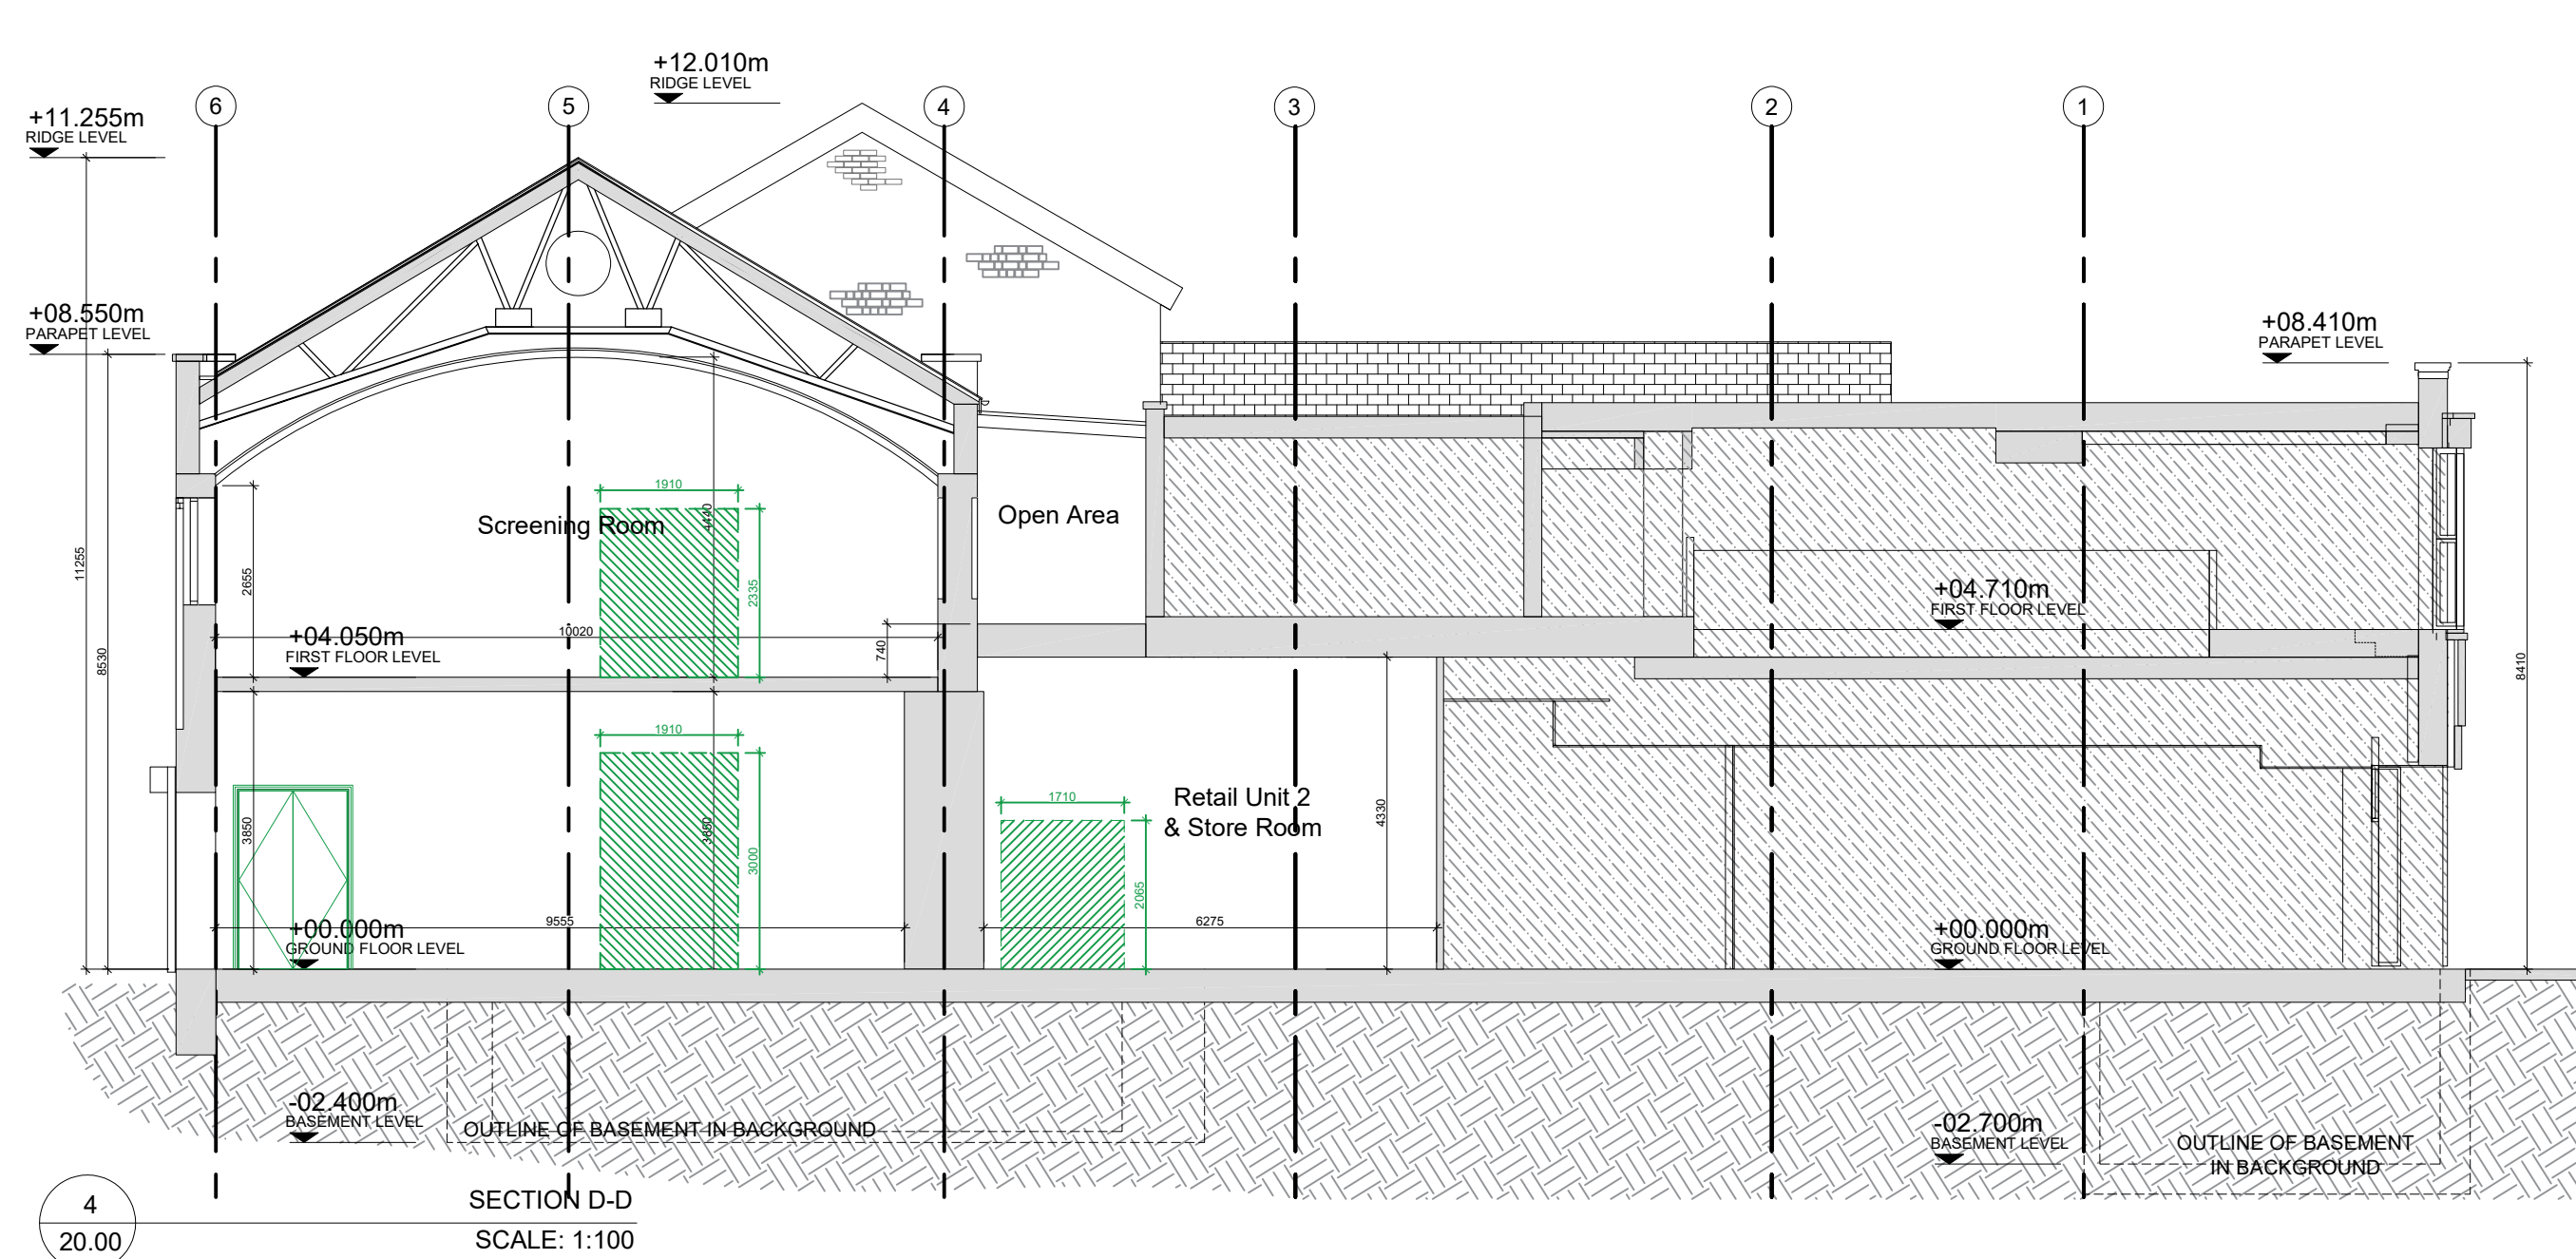

SECTION D-D
SCALE: 1:100

- PHASE 2 DEMOLITION WORKS LEGEND**
TO BE READ IN CONJUNCTION WITH DRAWING SERIES 11-00 (DEMOLITION PLANS) FOR FULL DESCRIPTION OF INTERIOR & EXTERIOR WORKS
1. REMOVAL OF 5no EXISTING WINDOWS & EXTERNAL SCREENS TO BE DISPOSED OF BY CONTRACTOR. EXISTING OPES TO BE MADE UP IN PREPARATION OF NEW WINDOWS TO BE INSTALLED. EXTERNAL FACADE TO BE MADE GOOD AS REQUIRED.
 2. EXISTING SIGNAGE TO BE REMOVED & DISPOSED OF BY CONTRACTOR. WALLS TO BE MADE GOOD ON COMPLETION OF WORKS.
 3. EXISTING EXTERNAL DOORS TO BE REMOVED & REPLACED WITH NEW. LEVEL THRESHOLD TO BE MAINTAINED.
 4. OPE TO BE FORMED IN EXISTING FACADE FOR DOOR SET INSTALLATION. CONTRACTOR TO ENSURE LEVEL THRESHOLD IS ACHIEVED. ALLOW FOR TRENCHES BENEATH SWITCHROOM DOORS FOR ESB CABLES. EXACT REQUIREMENTS TBC.
 5. EXISTING DOORS & OVERHEAD SIGNAGE TO BE REMOVED. PARTIAL BLOCKWORK INFILL SECTION REQUIRED TO FORM NEW DOOR OPE. RENDER FINISH TO MATCH THAT OF EXISTING.
 6. EXISTING SHUTTER & HOUSING SECTION TO BE REMOVED. REMEDIAL WORKS REQUIRED TO OPE FOR INSTALLATION OF NEW DOUBLE DOORS. RENDER FINISH TO MATCH THAT OF EXISTING PRIOR TO INSTALLATION OF NEW SECURITY SHUTTER HOUSING.
 7. EXISTING DOUBLE DOOR TO BE REMOVED. PARTIAL BLOCKWORK INFILL REQUIRED TO FORM NEW SINGLE DOOR OPE. RENDER FINISH TO MATCH THAT OF EXISTING.
 8. EXISTING SCREENS & WINDOWS TO BE RETAINED, ALLOW FOR REMEDIAL WORKS TO BE CARRIED OUT TO EXISTING WINDOWS AS REQUIRED.
 9. REMOVAL OF EXISTING SHOP FRONT INCLUDING GLAZING, OVERHEAD SIGNAGE, PROTRUDING SIGNAGE, OVERHEAD LIGHTING, COLUMN ENCASEMENTS & SHUTTERS TO MAIN FACADES, OPES TO BE MADE GOOD IN PREPARATION FOR NEW FACADE. DEMOLITION WORKS TO BE COORDINATED WITH INTERIOR FITOUT WORKS.
 10. REMOVAL OF PROTRUDING OVERHEAD BEAM AS INDICATED, TO BE READ IN CONJUNCTION & CONFIRMED BY STRUCTURAL ENG'S.
 11. EXISTING SINGLE DOOR TO BE REMOVED, BLOCKWORK INFILL TO OPE, RENDERED FINISH TO MATCH EXISTING FACADE.

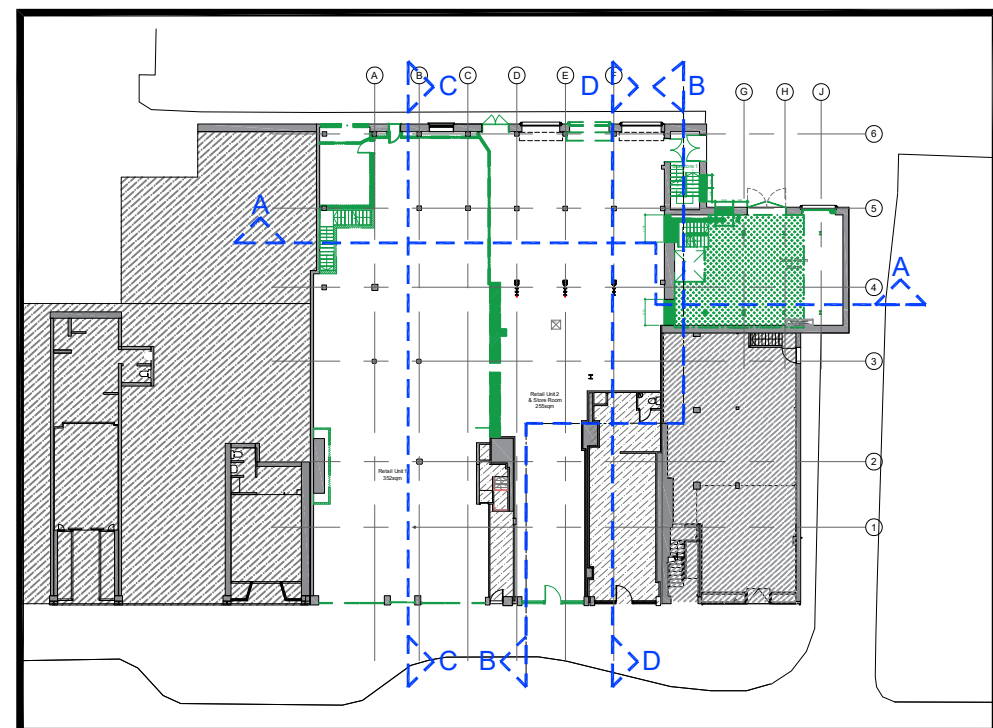

GFL_KEYPLAN
SCALE: NTS

A1

Do not scale drawing, work to figured dimensions. All dimensions to be checked on site. Any errors or discrepancies to be reported to MILLIMETRE DESIGN. This drawing may not be edited or modified without permission. This drawing is to be read in colour and in conjunction with all relevant consultant and specialist drawings, schedules and documentation. Only build from drawings issued as Construction.

Legend

AREA OUTSIDE SCOPE OF WORKS

EXTENT OF DEMOLITION WORKS

Notes:

CONTRACTORS COMPOUND FOR DURATION OF WORKS TO BE LOCATED WITHIN FOOTPRINT OF BUILDING. FINAL POSITION TO BE CONFIRMED BASED ON PHASING OF DEMOLITION WORKS.

CONTRACTOR TO REVIEW LEVELS OF EXISTING SLABS THROUGHOUT UPON DEMOLITION OF DOOR OPES etc. EXTENT OF SCREED REQUIRED TO EXISTING SLAB IN ORDER TO ACHIEVE LEVEL THRESHOLDS BETWEEN BUILDINGS TO BE CONFIRMED BY STRUCTURAL ENG. FINAL ON SITE FFL TO BE CONFIRMED

TO BE READ IN CONJUNCTION WITH STRUCTURAL ENG'S DRAWINGS.

To be read in conjunction with all relevant drawings & schedules, refer to drawing register for breakdown of drawings.

Drawing to be printed in colour.

#	13.03.26	SMC	FIRST ISSUE
REV	DATE	APP BY	DESCRIPTION
 MILLIMETRE DESIGN			
4 O'ngar Square, O'ngar Village, Dublin 15, D15 H34C			
+353 1 826 3971 info@millimetredesign.com			
www.millimetredesign.com			
This drawing is the property of Millimetre Design Ltd & must not be reproduced without prior consent.			
CLIENT	Carrolls Irish Gifts Immersive Experience		
PROJECT ADDRESS	Talbot Street, North City, Dublin 1, D01 X652		
DWG TITLE	EXISTING SECTIONS DEMOLITION WORKS		
EDITION	TENDER		
DWG NO	CIX-TD-20.00		
REV	PROJECT NO	SCALE	
#	CIX	1:100	
DATE	JAN 2026	DRN	SMC APP