




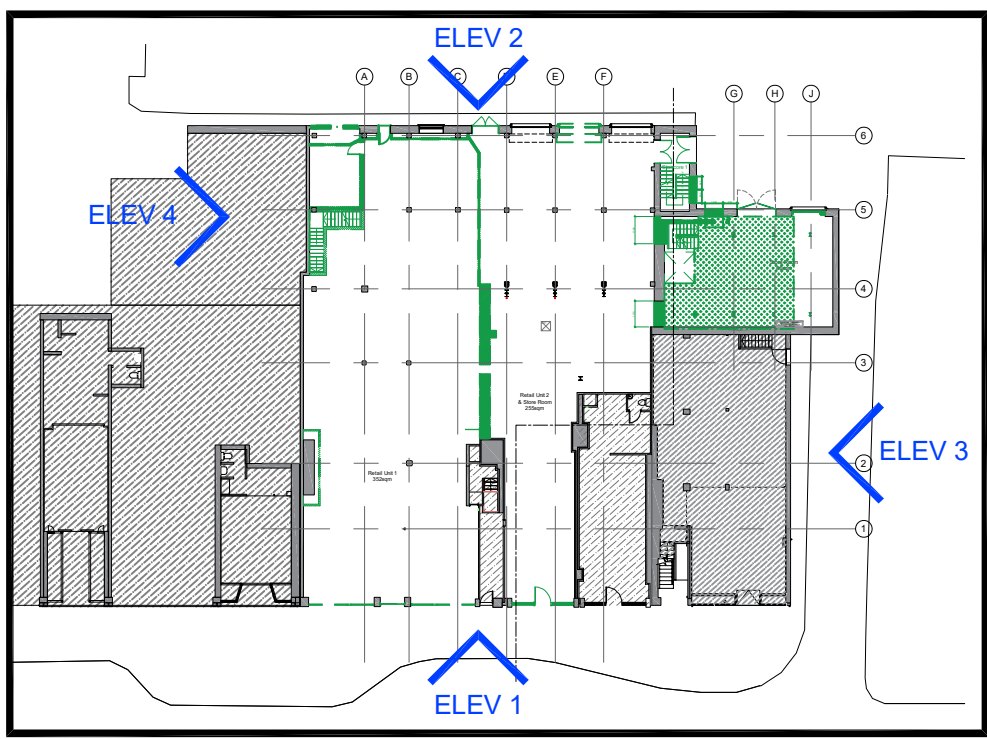

1
30.00
GFL KEYPLAN
SCALE: NTS

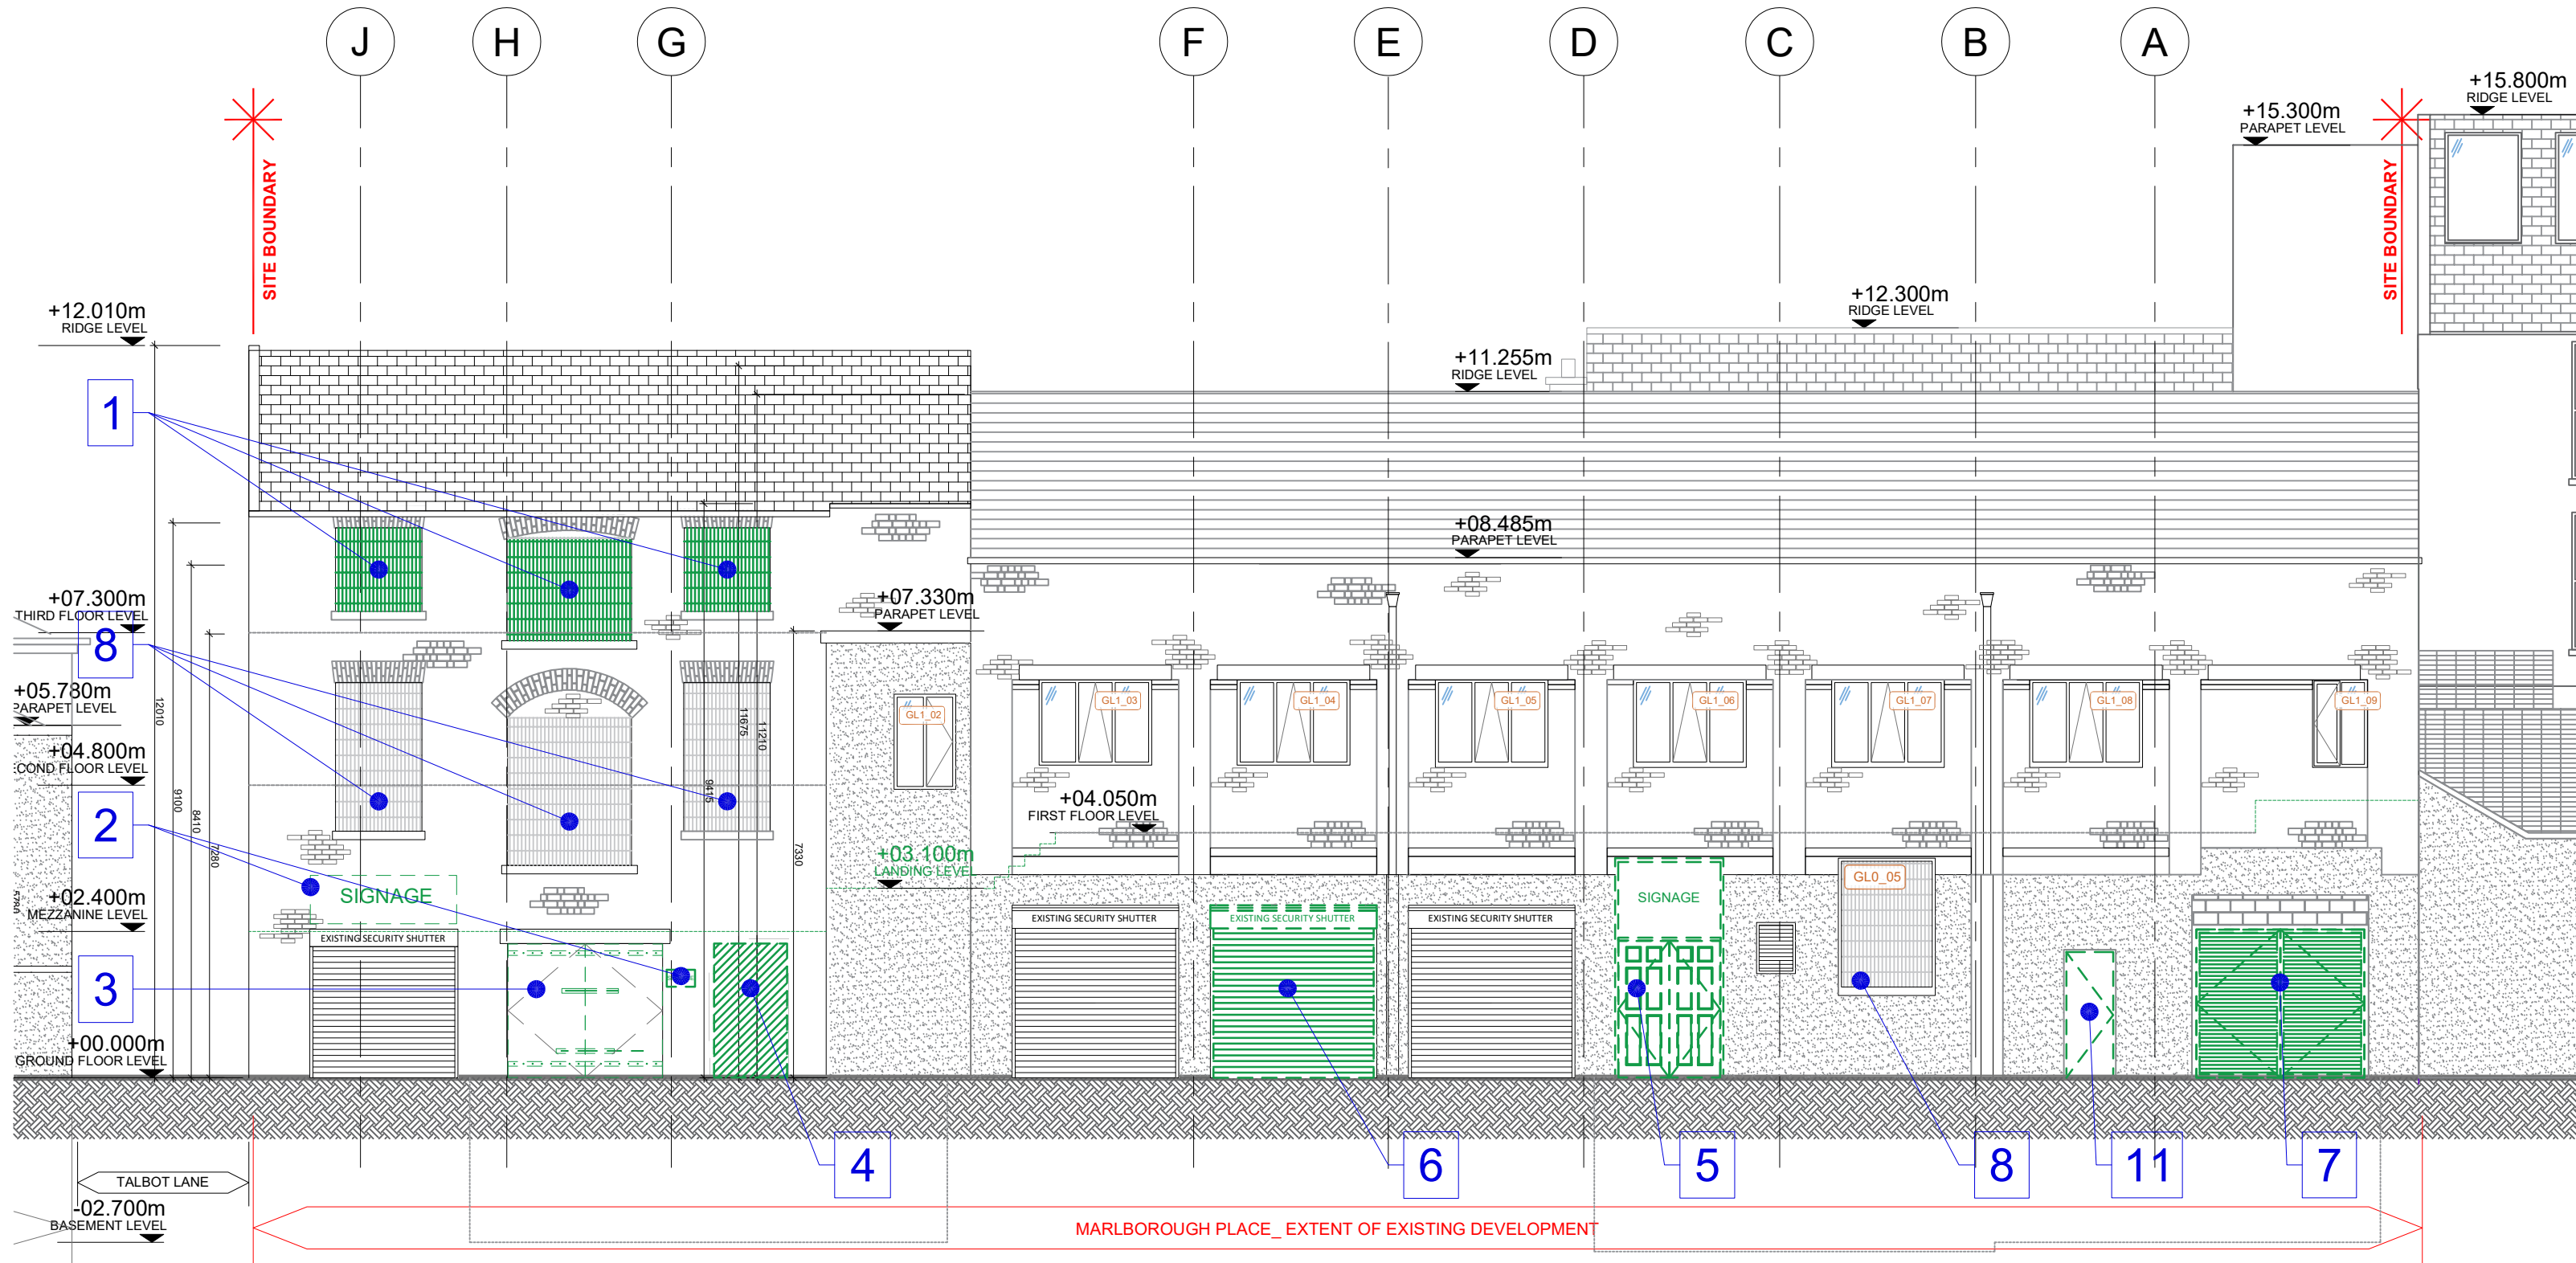

2
30.00
SOUTH ELEVATION_MARLBOROUGH PLACE
SCALE: 1:100

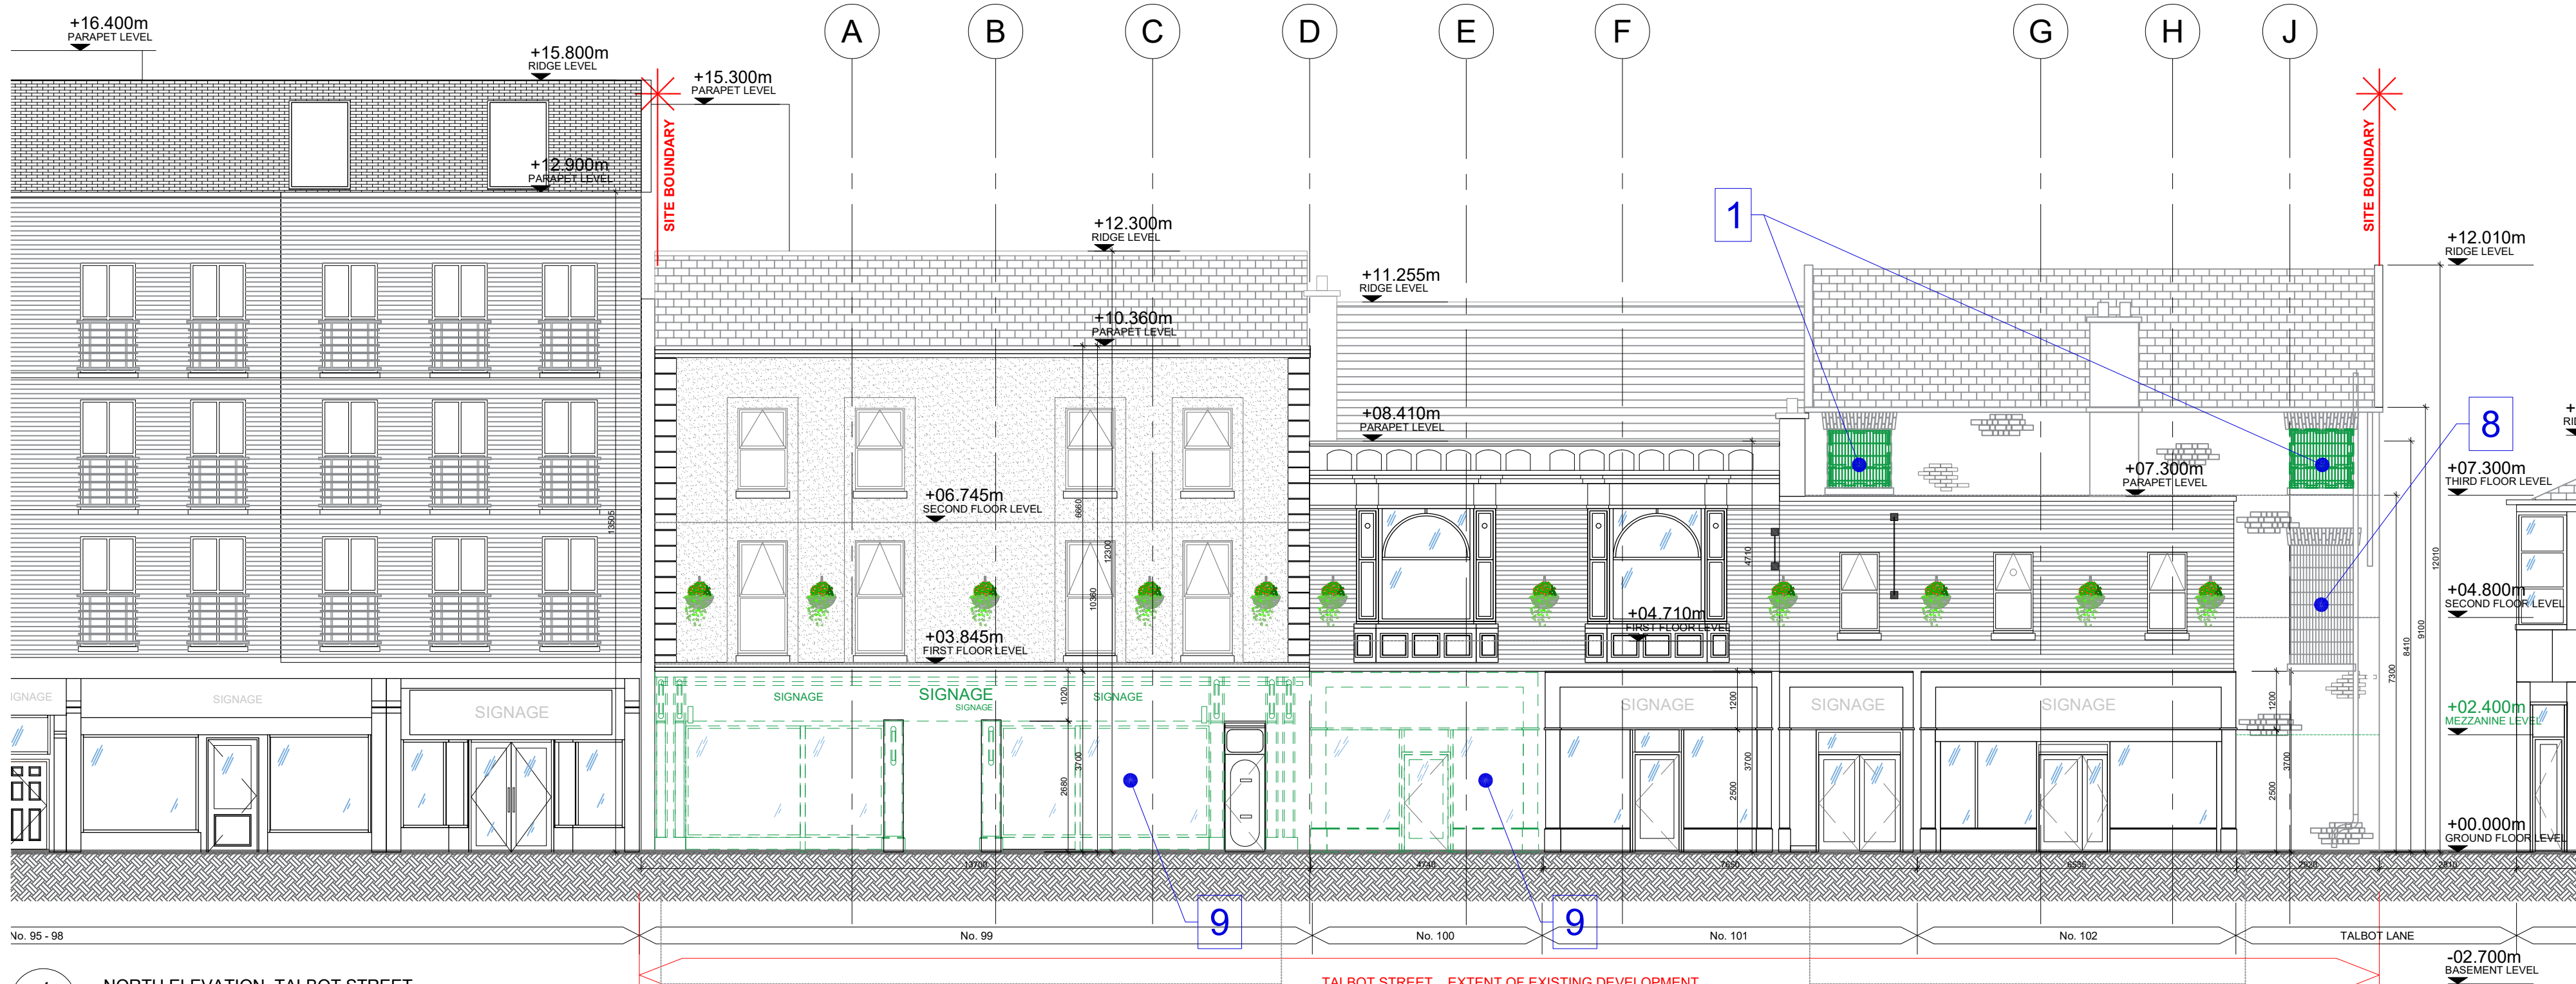

4
30.00
NORTH ELEVATION_TALBOT STREET
SCALE: 1:100

PHASE 2 DEMOLITION WORKS LEGEND
TO BE READ IN CONJUNCTION WITH DRAWING SERIES 11-00 (DEMOLITION PLANS) FOR FULL DESCRIPTION OF INTERIOR & EXTERIOR WORKS

1. REMOVAL OF 5th EXISTING WINDOWS & EXTERNAL SCREENS TO BE DISPOSED OF BY CONTRACTOR. EXISTING OPES TO BE MADE UP IN PREPARATION OF NEW WINDOWS TO BE INSTALLED. EXTERNAL FACADE TO BE MADE GOOD AS REQUIRED.
2. EXISTING SIGNAGE TO BE REMOVED & DISPOSED OF BY CONTRACTOR. WALLS TO BE MADE GOOD ON COMPLETION OF WORKS.
3. EXISTING EXTERNAL DOORS TO BE REMOVED & REPLACED WITH NEW. LEVEL THRESHOLD TO BE MAINTAINED.
4. OPE TO BE FORMED IN EXISTING FACADE FOR DOOR SET INSTALLATION. CONTRACTOR TO ENSURE LEVEL THRESHOLD IS ACHIEVED. ALLOW FOR TRENCHES BENEATH SWITCHROOM DOORS FOR ESB CABLES. EXACT REQUIREMENTS TBC.
5. EXISTING DOORS & OVERHEAD SIGNAGE TO BE REMOVED. PARTIAL BLOCKWORK INFILL SECTION REQUIRED TO FORM NEW DOOR OPE. RENDER FINISH TO MATCH THAT OF EXISTING.
6. EXISTING SHUTTER & HOUSING SECTION TO BE REMOVED. REMEDIAL WORKS REQUIRED TO OPE FOR INSTALLATION OF NEW DOUBLE DOORS. RENDER FINISH TO MATCH THAT OF EXISTING PRIOR TO INSTALLATION OF NEW SECURITY SHUTTER HOUSING.
7. EXISTING DOUBLE DOOR TO BE REMOVED. PARTIAL BLOCKWORK INFILL REQUIRED TO FORM NEW SINGLE DOOR OPE. RENDER FINISH TO MATCH THAT OF EXISTING.
8. EXISTING SCREENS & WINDOWS TO BE RETAINED, ALLOW FOR REMEDIAL WORKS TO BE CARRIED OUT TO EXISTING WINDOWS AS REQUIRED.
9. REMOVAL OF EXISTING SHOP FRONT INCLUDING GLAZING, OVERHEAD SIGNAGE, PROTRUDING SIGNAGE, OVERHEAD LIGHTING, COLUMN ENCASUREMENTS & SHUTTERS TO MAIN FACADES, OPES TO BE MADE GOOD IN PREPARATION FOR NEW FACADE. DEMOLITION WORKS TO BE COORDINATED WITH INTERIOR FITOUT WORKS.
10. REMOVAL OF PROTRUDING OVERHEAD BEAM AS INDICATED, TO BE READ IN CONJUNCTION & CONFIRMED BY STRUCTURAL ENG'S.
11. EXISTING SINGLE DOOR TO BE REMOVED, BLOCKWORK INFILL TO OPE, RENDERED FINISH TO MATCH EXISTING FACADE.

A1

Legend

- AREA OUTSIDE SCOPE OF WORKS
- EXTENT OF DEMOLITION WORKS


Notes:
CONTRACTORS COMPOUND FOR DURATION OF WORKS TO BE LOCATED WITHIN FOOTPRINT OF BUILDING. FINAL POSITION TO BE CONFIRMED BASED ON PHASING OF DEMOLITION WORKS.

CONTRACTOR TO REVIEW LEVELS OF EXISTING SLABS THROUGHOUT UPON DEMOLITION OF DOOR OPES etc. EXTENT OF SCREED REQUIRED TO EXISTING SLAB IN ORDER TO ACHIEVE LEVEL THRESHOLDS BETWEEN BUILDINGS TO BE CONFIRMED BY STRUCTURAL ENG. FINAL ON SITE FFL TO BE CONFIRMED


TO BE READ IN CONJUNCTION WITH STRUCTURAL ENG'S DRAWINGS.

To be read in conjunction with all relevant drawings & schedules, refer to drawing register for breakdown of drawings.

Drawing to be printed in colour.

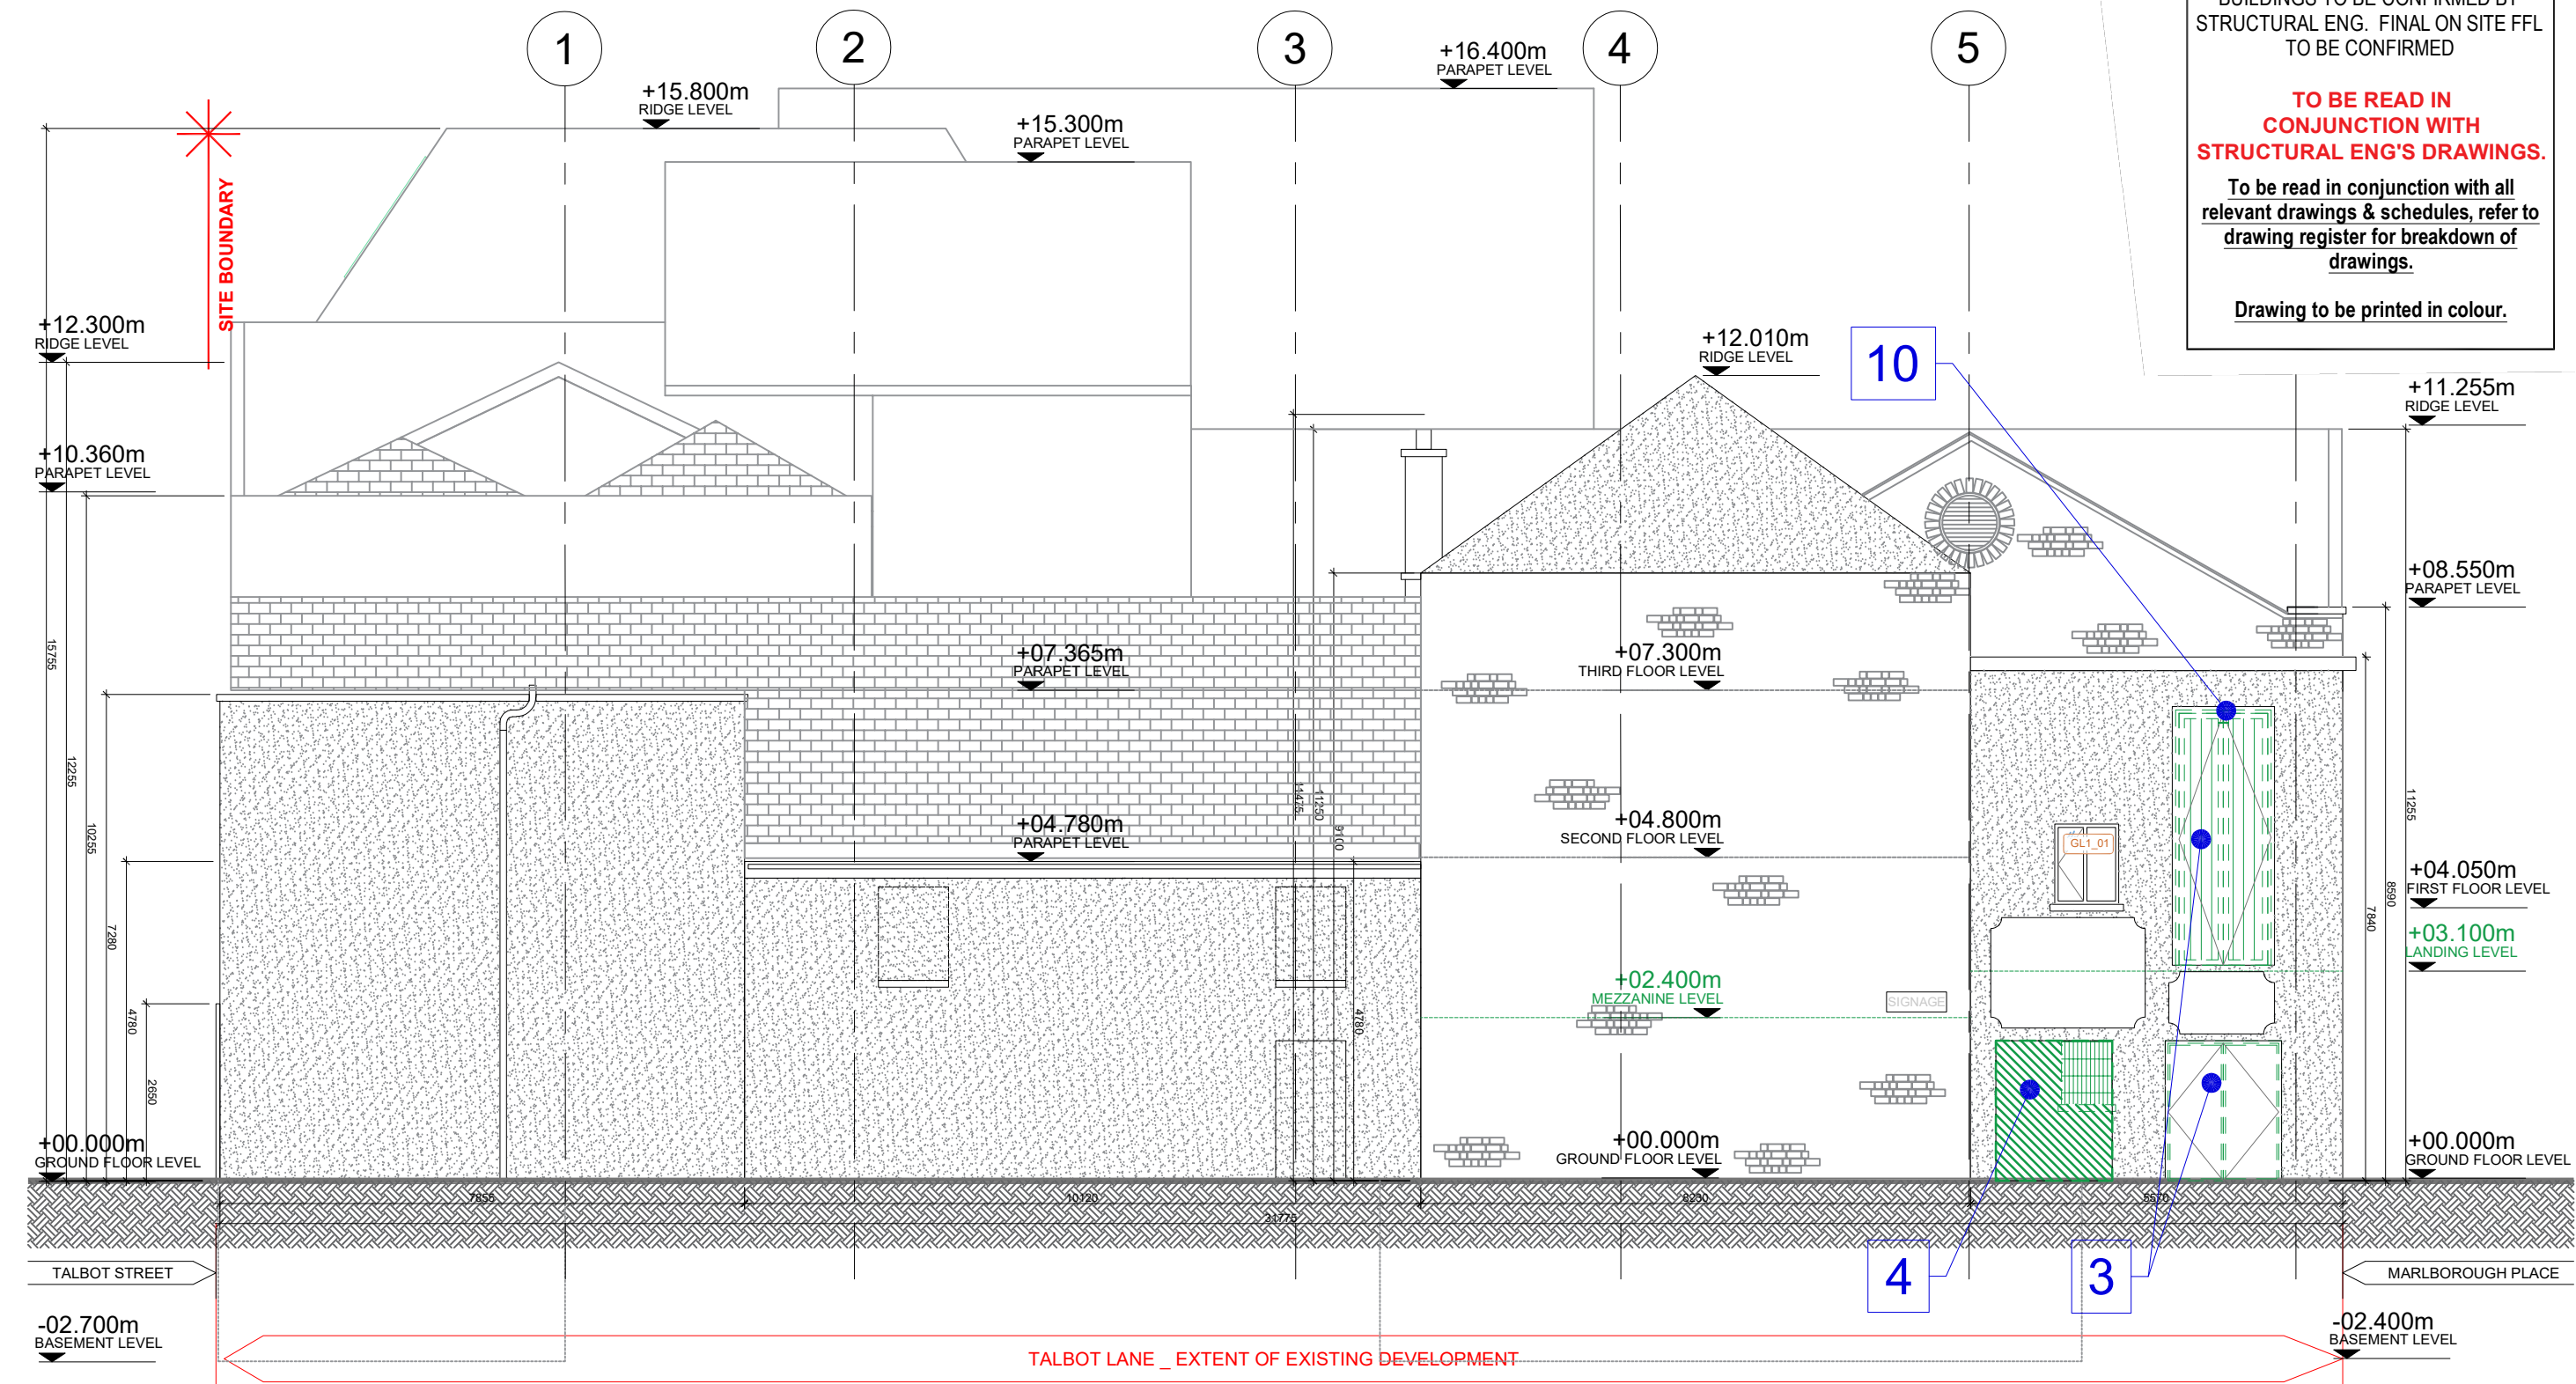

3
30.00
WEST ELEVATION_TALBOT LANE
SCALE: 1:100

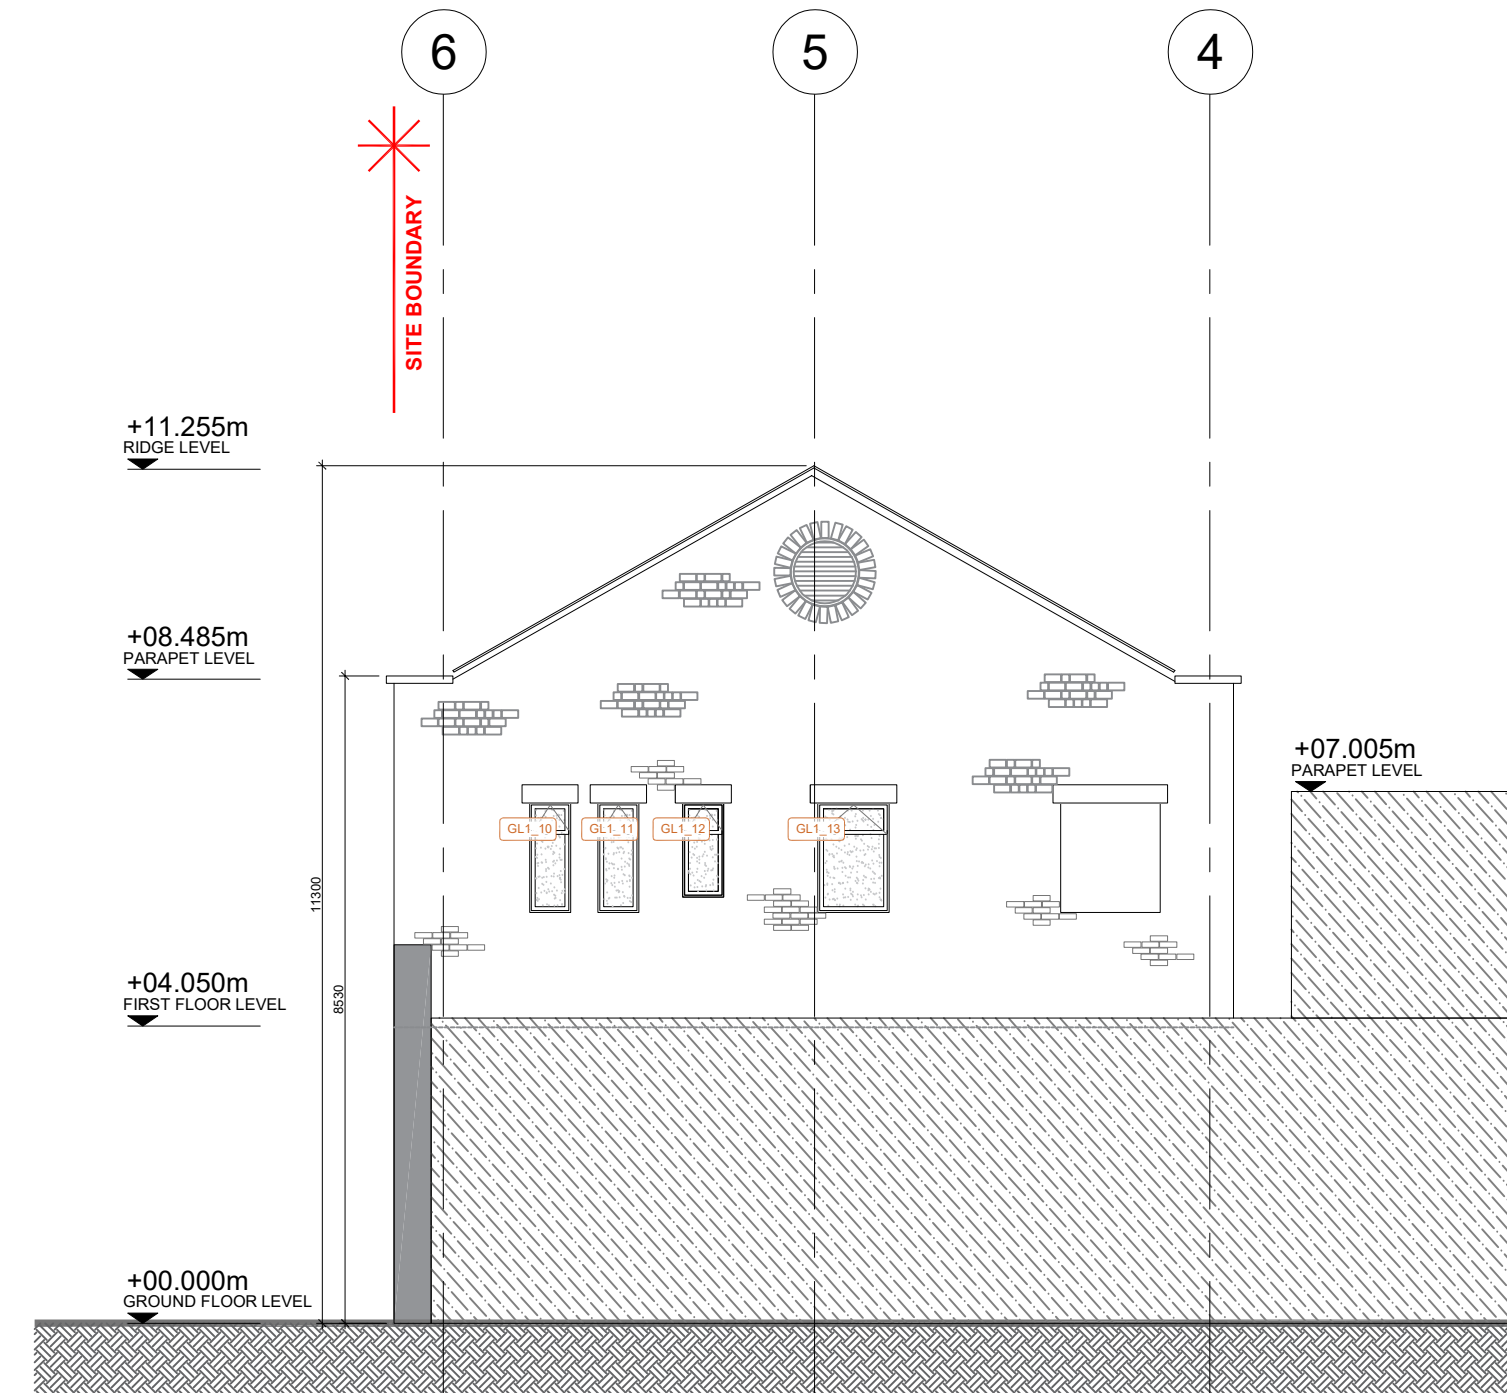

5
30.00
WEST ELEVATION
SCALE: 1:100

#	13.03.26	SMC	FIRST ISSUE
REV	DATE	APP BY	DESCRIPTION
4 Ongar Square, Ongar Village, Dublin 15, D15 H34C			
+353 1 826 3971 info@millimetredesign.com			
www.millimetredesign.com			
This drawing is the property of Millimetre Design Ltd & must not be reproduced without prior consent.			
CLIENT	Carrolls Irish Gifts		
PROJECT ADDRESS	Immersive Experience Talbot Street, North City, Dublin 1, D01 X652		
DWG TITLE	EXISTING ELEVATIONS DEMOLITION WORKS		
EDITION	TENDER		
DWG NO	CIX-TD-30.00		
REV	PROJECT NO	SCALE	
	CIX	1:100	
DATE	JUNE 2025	DRN	SMC
		APP	